


Air Handler Specifications

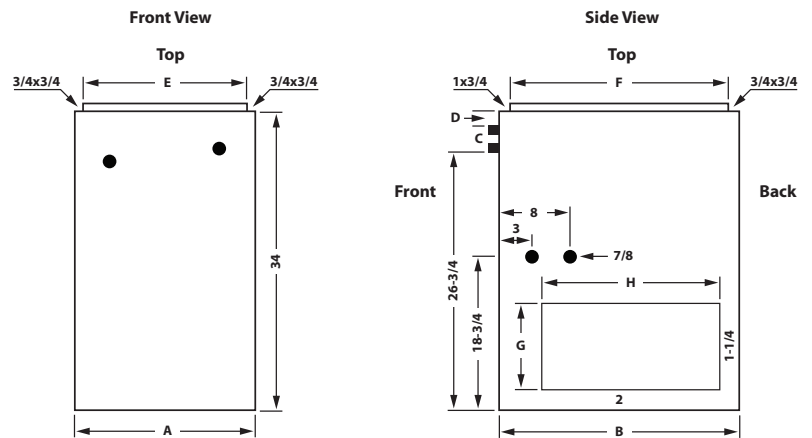

MODEL	A	B	C	D	E	F	G	H	WATER LINES = ID	SHIPPING WEIGHT = LBS
AH-70	18-1/2	21-1/8	5-5/8	1-1/2	17	19-1/4	12	17-3/4	1	105
AH-95	18-1/2	21-1/8	5-5/8	1-1/2	17	19-1/4	14	17-3/4	1	105
AH-115	20-3/4	23	5-5/8	1-1/2	19-1/4	21-1/8	14	17-3/4	1	129
AH-135	20-3/4	23	5-5/8	1-1/2	19-1/4	21-1/8	14	17-3/4	1	131
AH-150	20-3/4	23	5-5/8	1-1/2	19-1/4	21-1/8	14	17-3/4	1	133
AH-195	25-3/4	28	5-5/8	1-1/2	24-1/4	26-1/8	14	22-3/4	1	169
AH-220	25-3/4	28	5-5/8	1-1/2	24-1/4	26-1/8	14	22-3/4	1	172

Air Handler Specifications. Internal Specifications using water. Entering Air Temperature = 65°

MODEL	BTUs EWT-200°	BTUS EWT-180°	CFM-Blower Speed-Amps	GPM	APD	Speeds	Approx FOH-WPD	Approx LWT at 200°	Aprox LWT at 180°	HP
AH-70	77,728	65,958	768-L-3.8	10	.22	3	2.12	183°	166°	1/4
AH-95	106,241	90,014	1,158-L-5.1	10	.48	4	2.12	177°	161°	1/3
AH-115	126,023	106,850	1,467-M-6.6	12	.53	4	2.58	178°	161°	1/2
AH-135	151,856	128,753	1,691-H-7.2	13	.63	4	3.21	175°	159°	1/2
AH-150	160,813	136,344	1,769-H-7.4	12	.64	4	3.03	172°	156°	1/2
AH-195	212,413	179,974	2,500-H-10.5	12	.48	4	2.26	163°	149°	3/4
AH-220	233,373	197,884	2,498-H-10.5	14	.54	4	2.66	165°	150°	3/4

These results have been calculated using a combination of physical testing and computer software designed for the use of developing heat exchangers and related products. These produced results are believed to be accurate. Actual results may vary depending on installation.



P: 1-866-361-7355 F: 1-218-283-5786 W: www.northlanddistrib.com

Mailing: Northland Distributing & Manufacturing, Inc. • 2716 Crescent Dr. • International Falls, MN • 56649 • U.S.A.